




# USER MANUAL

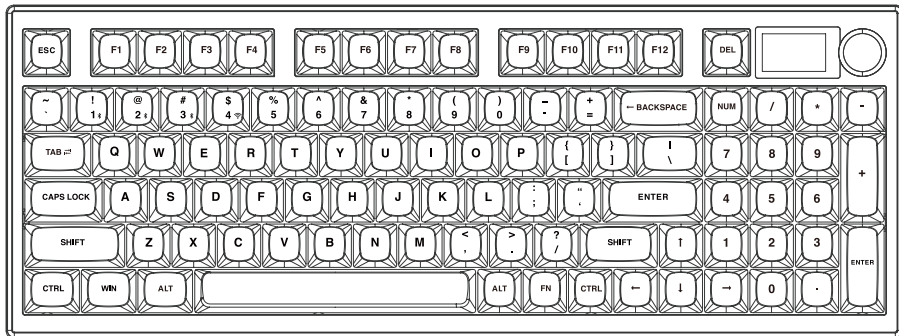

**Fully Customizable / Hot Swappable / RGB Lights**

**Factory Product Name: Mechanical Keyboard**

**Factory Keyboard Model: K96Pro**

**Support System: ( Win/Android/Mac/IOS )**


**Base Material:ABS**

**Switch Support:3pin or 5pin mechanical switches**

**Power Cable Support:USB Type-C**

**Backlight : RGB      Software:VIA**


# 1. System switching / Working mode switching

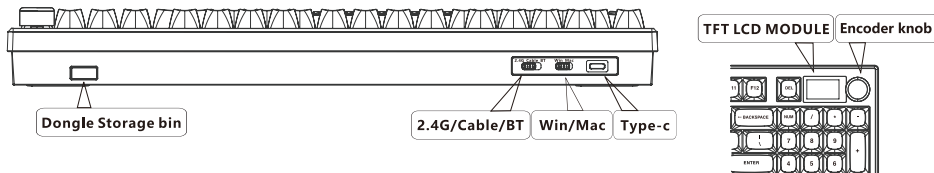

## 2. Bluetooth pairing / 2.4G pairing

**FN+1/2/3** Long press pairing and short press to switch channels


**FN+4** Long press pairing and short press to switch channels

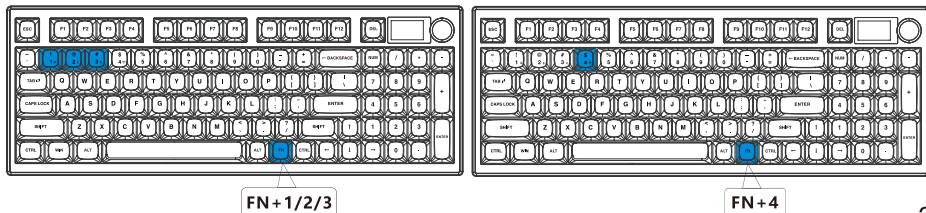


### 3. Lamp efficiency Mode switching /Restoring factory settings

**FN+BACKSPACE** Lamp efficiency Mode switching

Press FN+ ESC key for 3 seconds to restore all backlit red lights flashing 3 times

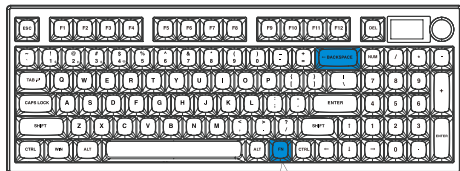


**FN+BACKSPACE**

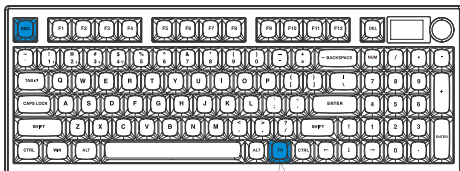

**FN+ESC**

### 4. Adjustment of backlight chromaticity

Adjust chromaticity by FN+ TAB in static mode

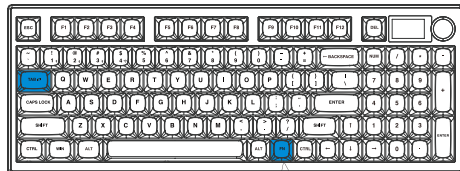


**FN+TAB**


## 5. The breathing speed of backlight lamp effect

FN + Direction left = Backlight breathing speed decrease

FN + Direction right = Backlight breathing speed increase

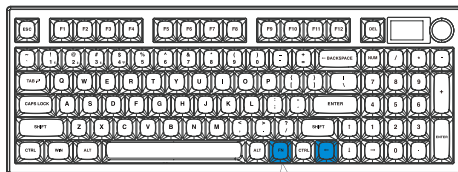

FN+left

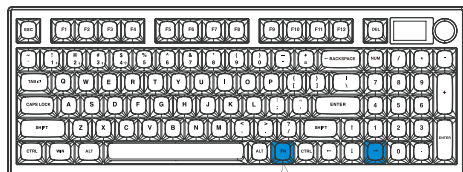


FN+right


## 6. Backlight brightness adjustment

FN + UP = Backlight brightness increase

FN + DN = Backlight brightness decrease

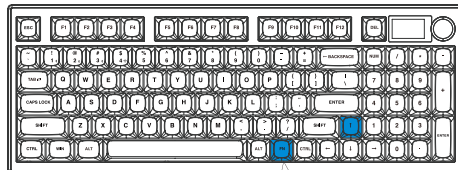

FN+Up

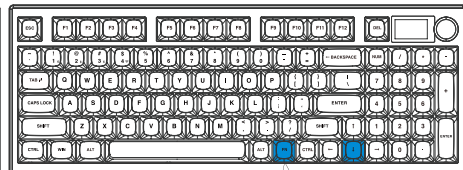


FN+Dn

## 7. Adjustment of backlight saturation


FN+short press the knob to turn off the backlight

FN+ Encoder rotation counterclockwise  
backlight saturation decrease

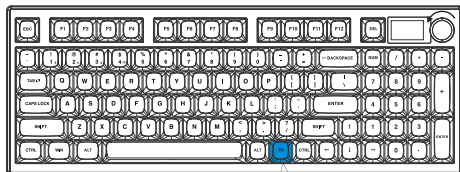

FN+ encoder rotates counterclockwise


FN+ Encoder rotates clockwise  
backlight saturation increase

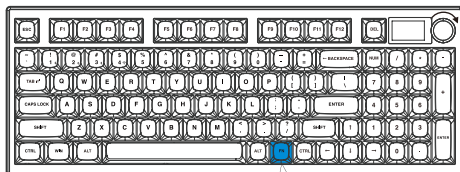


FN+ encoder rotates clockwise

## 8. Volume adjustment

Short press on the knob to turn off the sound  
Encoder rotates volume clockwise increase

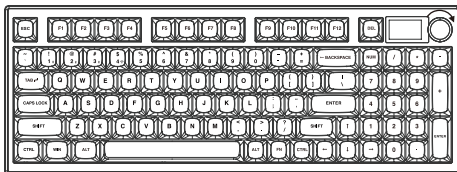



Encoder rotates counterclockwise volume decrease

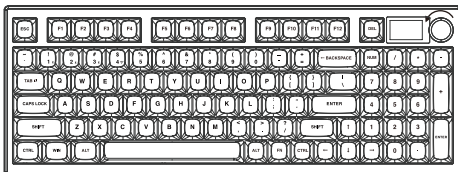

## 9.LED status overview / TFT LCD Module


Keyboard uppercase state This key is always red light  
Lowercase status follows the backlight

NUM key The steady red indicates that the numeric keypad is activated and the NUM icon is on

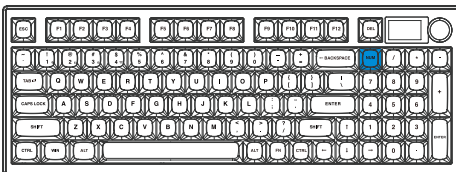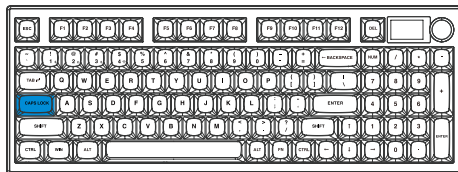


FN + DEL can switch the display animation

In the Win system, press FN + WIN = lock the WIN key. At the same time, the lock mark on the display is lit

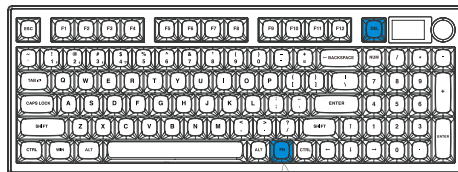

FN + DEL

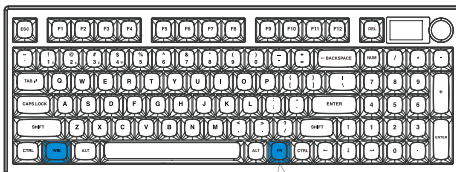

FN + WIN

## 10. Description of multimedia combination

Source button (Press first)	Combine key (Then press)	Multimedia function (WIN)	Multimedia function (MAC Default)
<b>FN+</b>	F1	Brightness decrease	Brightness decrease
	F2	Brightness increase	Brightness increase
	F3	Mail	
	F4	Search	
	F5	calculator	
	F6	Music	
	F7	Last one	Last one
	F8	Pause / play	Pause / play
	F9	Next one	Next one
	F10	Mute	Mute
	F11	Volume decrease	Volume decrease
	F12	Volume increase	Volume increase

## **11. Support wireless mode switching/pairing**

### **Bluetooth :**

**FN+ 1/ 2/3 (short press to switch, long press to pair)**

The Corresponding key light indicates that it flashes quickly when pairing, and flashes slowly when reconnecting. After the connection was successful, the key light stays on for 2 seconds and then returns to the overall backlight effect. If the pair cannot be paired within 1 minute, it will automatically enter the sleep state;

When connecting back, if the connection is not successful within 20 seconds, it will automatically enter sleep.

### **2.4G:**

**FN+4 (short press to switch, long press to pair)**

## **12. Sleep mode**

If there is no action in the wireless state for 10 minutes, the keyboard automatically enters the first level sleep. At this time, the light is off, the Bluetooth or 2.4G is in the connected state, and there is key output at the same time. When the keyboard does not work for 30 minutes, it enters the second-level hibernation state. At this time, the wireless of the keyboard is disconnected. No code will be sent when the keyboard is pressed for the first time, When the keyboard is automatically connected after waking up, there will be key output after the connection is normal.

## **13. Battery indicator /Time calibration**

**Lithium battery (3.7V):**

**The TFT LCD display displays the battery power in real time.**

**Please charge it in time when the power is too low.**

**Keyboard battery below 3.0V will automatically shut down,**

**After automatic shutdown, the key is invalid.**

**If you have replaced the internal battery or want to reset the time,**

**You will need to download the tool to recalibrate the time.**

**Please log in to the link: [www.microcenter.com](http://www.microcenter.com) Search the**

**SKU NO. of the product on the homepage**

**How to use: open the tool, VID input 0C45; PID input 800B, and then**

**click start, and then insert the keyboard to automatically approve time**

## **14. Technical Specifications**

**Keyboard size: 377.3\*140.3\*45.5mm**

**Maximum brightness operating current : < 200 mA**

**Working distance: 8-10m**

**Lithium battery capacity: 4000 mAh**

**Working voltage: 3.7V**

**Charger specifications: 5V  $\overline{\text{---}}$  1A**

## 15. VIA Key remapping software

VIA is software that maps buttons, If VIA software does not recognize your keyboard

Please contact us for technical support

(VIA is valid only when the keyboard is connected to the computer via a data line)

## 16. Keyboard features

- Tri modes:Wired/Bluetooth/2.4G
- 96 key minimalist style, freely mapped key code and lamp effect
- Removable Power Cable
- Key switches are freely customizable and support hot-swappable
- Built-in large capacity lithium battery
- A full keyboard RGB cool lighting effect
- Independent metal knob adjust volume
- TFT LCD Module drives the painting effect

## 17. Restore factory settings

What if the keyboard fails, or if you want to go back to your original state after modifying the key code and light effect?

1. Press fn+ESC in order (wait 3 seconds); restore factory settings.
2. Download the correct firmware for your keyboard from our website, and then unplug the data line from the keyboard.
3. Unplug the space bar key cap and find the reset point of the PCB
4. Short-circuit the reset point for a long time, insert the keyboard data cable at the same time, and then disconnect the reset point, and the keyboard enters DFU mode.
5. You can then use the QMK toolbox to refresh the firmware.
6. Restore the keyboard to the factory settings again and press fn+ESC for 3 seconds.

## 18 . FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## **What's in the Package?**

- 1x96-Keys Tri model Mechanical keyboard**
- 1x USB Dongle**
- 1x USB Type-C Cable**
- 1x User Manual**
- 1x Quick Start Guide**
- 1x 2-in-1 Keycap puller switch puller**

### **Note:**

**Do not place the accessories and packaging parts of this product in contact with children in order to prevent asphyxiation caused by accidents.**

**Do not expose the product to extreme temperatures below -10 °C (5 °F) or above 50 °C (131 °F) to maintain the service life of the keyboard.**